

# OCTA FLOOR

CLASSIC | ECO

**DOUBLE FLOORS  
WITH A SYSTEM**





**DOWN  
TO  
EARTH**





## INTRO

Firmly grounded. Proven. A solid standing. We are all following the laws of gravity. No matter if we are standing, sitting or lying – there is always something beneath us. So we asked ourselves how a floor must be constructed so as to provide the best base for your exhibition booth or event. A floor that is easy to handle and flexible to use. Before, during and after installation. Here are our basic answers.



# STOCK PIL ED

A large stack of shipping containers, with blue ones on the left and white ones on the right, under a blue sky with clouds. The containers are stacked in a way that creates a sense of depth and scale.


**THE WORLD'S LARGEST FAIR  
GROUNDS ARE LOCATED IN  
HANNOVER, COVERING AN  
EXHIBITION AREA OF 496.000 M<sup>2</sup>.**

# CONTENT

---

<b>OCTAFLOOR floor systems</b>	<b>6</b>
<b>OCTACLASSIC FLOOR</b>	<b>8</b>
Technical features	10
Details	12
<b>OCTAECO FLOOR</b>	<b>14</b>
Technical features	16
Details	18



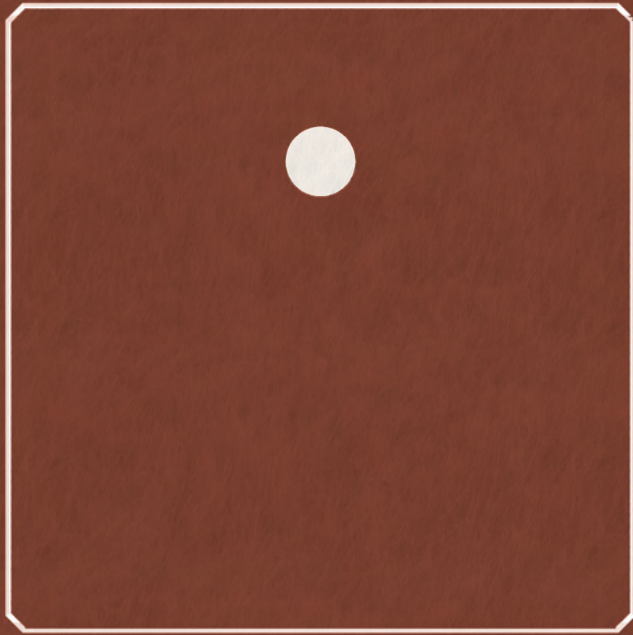


# 1 SUPPLIER 2 FLOORS ABSOLUTE FREEDOM

●

## FOR YOUR PROJECT

It's the product you don't see but so many need. It's the silent hero that makes all above it function and work. Working load limits of up to 20,000 kg per square meter. Water and weatherproof. Quick and easy to install. All this makes OCTAfloor more than just double floors. They are suitable for every project of any size. Indoors and outdoors. Individually adjustable to special shapes or uneven floors. With illuminated edges and edge guards. You are looking for a system that's not only down to earth and reliable, but also sustainable? We give you a choice of two.



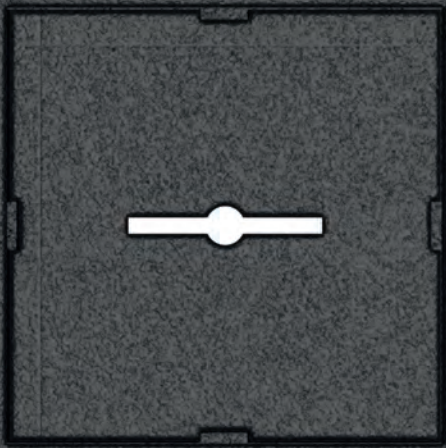





# APPROVED ADJUSTABLE LIGHTWEIGHT

**THE CLASSIC. MADE BY OCTANORM.**

A floor system that convinces with its reliability. Proven countless times. Individually adjustable floor panels and infinitely adjustable height – OCTAclassic floor combines flexibility and stability. You are looking for a light double floor system for your indoor events? You found it.



## OCTACLASSIC FLOOR









## TECHNICAL FEATURES


### OCTAclassic floor




Working load




Use



3 panel sizes




Individual panel




Different adjustable feet



Cable outlets per m<sup>2</sup>



Possible cable outlets per m<sup>2</sup> by rotating the panel



Illuminated edge guards possible



25 m<sup>2</sup> of floor panels on one pallet

#### **Up to 5,000 kg/m<sup>2</sup> working loads. Child's play.**

The working load limit can be adjusted individually through the amount of feet installed. Depending on your requirements, 4 up to 9 feet can be installed to maximize the loading capacity.

#### **3 panel sizes. Countless possibilities.**

The standard sizes of our floor panels are 998 × 998 mm, 998 × 498, and 498 × 498 mm. But since you can cut the SP12 tile to your requirements, this does not restrict your freedom the slightest.


#### **Stairs. Infinitely.**

The system offers three different feet, two of which are infinitely variable: allowing for heights of 95 – 225 mm (including tile height).



**Light weight. Easy handling.**

The OCTAclassic floor is the light weight of our floor systems. It scores not just because of the infinitely adjustable height, but also because of the low weight. This allows for large platforms being moved even with small equipment.

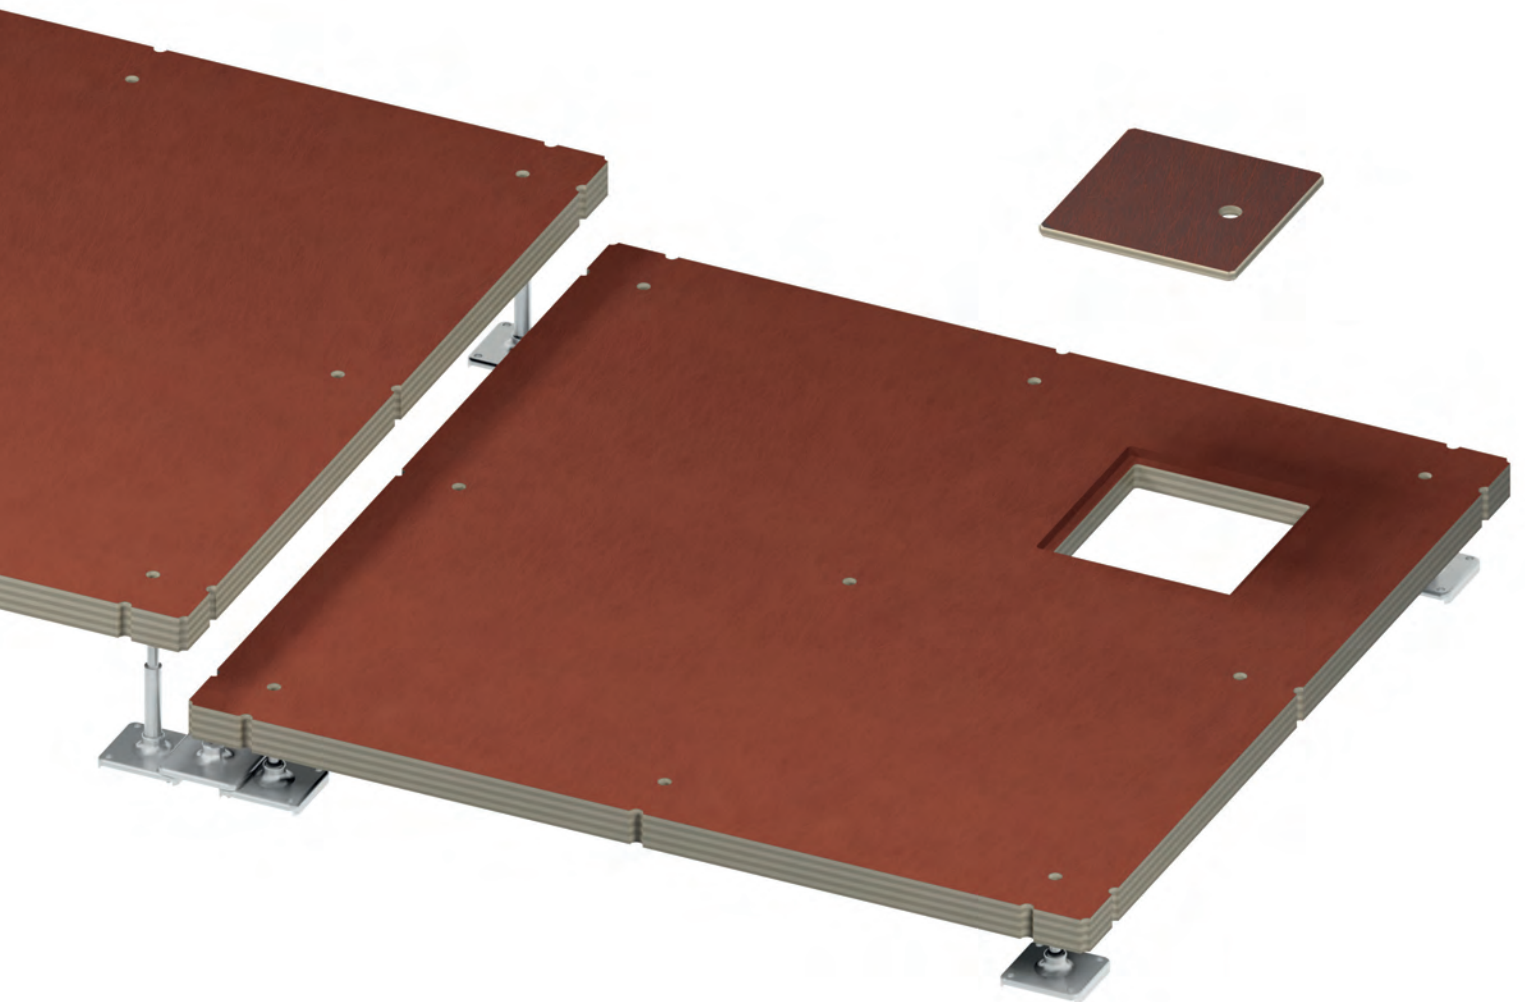


**The working load limit is increased with the amount of feet.**

The working load limit of a single panel can be adjusted individually to the requirements. You can increase your working load limit from 750 to 5,000 kg/m<sup>2</sup>.




## DETAILS

### OCTAclassic floor

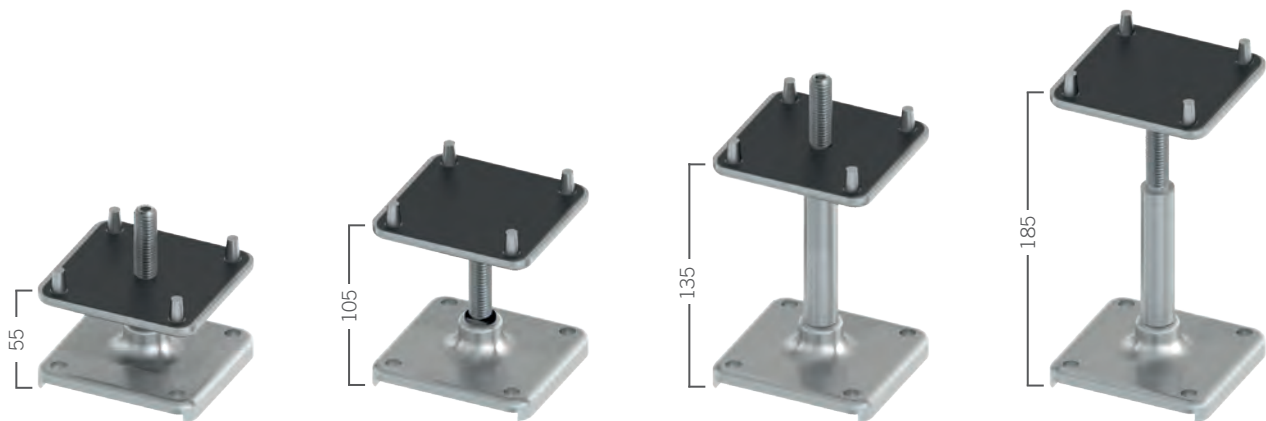

#### **2 adjustable feet. Infinitely adjustable height.**

By combining the different feet, different infinitely adjustable landing heights are possible. Noise suppressors and anti-slip rubber plates ensure safety and provide unwanted footfall sound insulation.

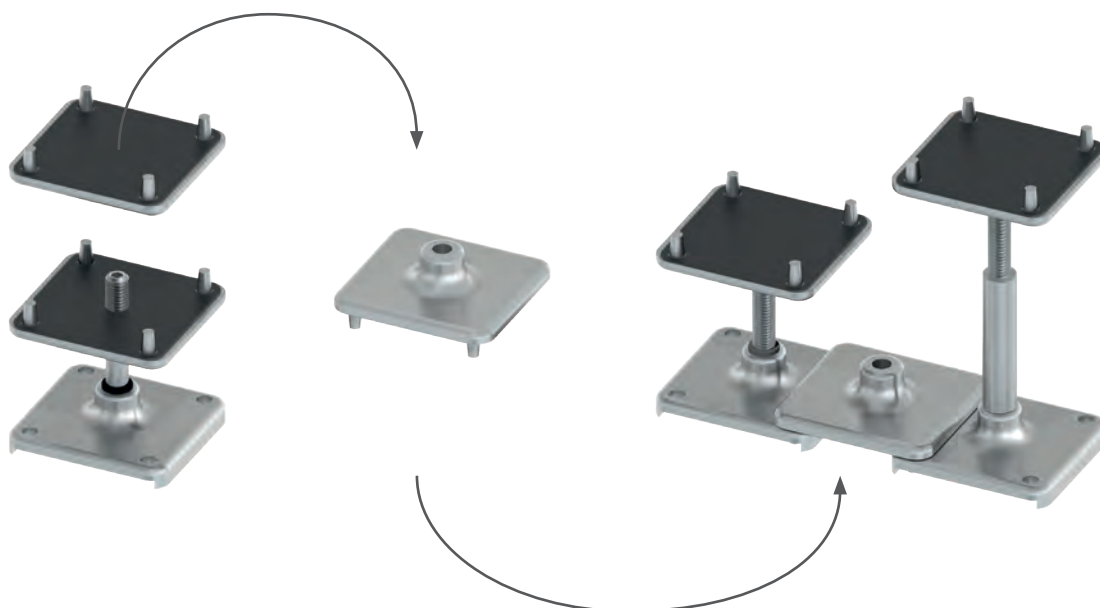



A red truck is parked on a black modular floor in a large industrial hall. The floor is made of interlocking black panels, some of which are labeled 'OCTAECO FLOOR'. The truck's front features a license plate that reads 'OCTANORM'. The hall has a high ceiling with a grid of lights and large windows in the background.

# QUICK EXTREMELY FLAT HEAVY DUTY

**BIG IMPACT IN LITTLE TIME**


Big areas, but little time? With OCTAeco floor you can realize big, heavy-duty areas in no time. Weights of up to 20,000 kg/m<sup>2</sup> are no problem. In any weather, since the event and exhibition floor is suitable for outside use. Save time and personnel. Be it cars or heavy machinery, the OCTAeco floor is always the right foundation. Again and again.



## OCTAECO FLOOR





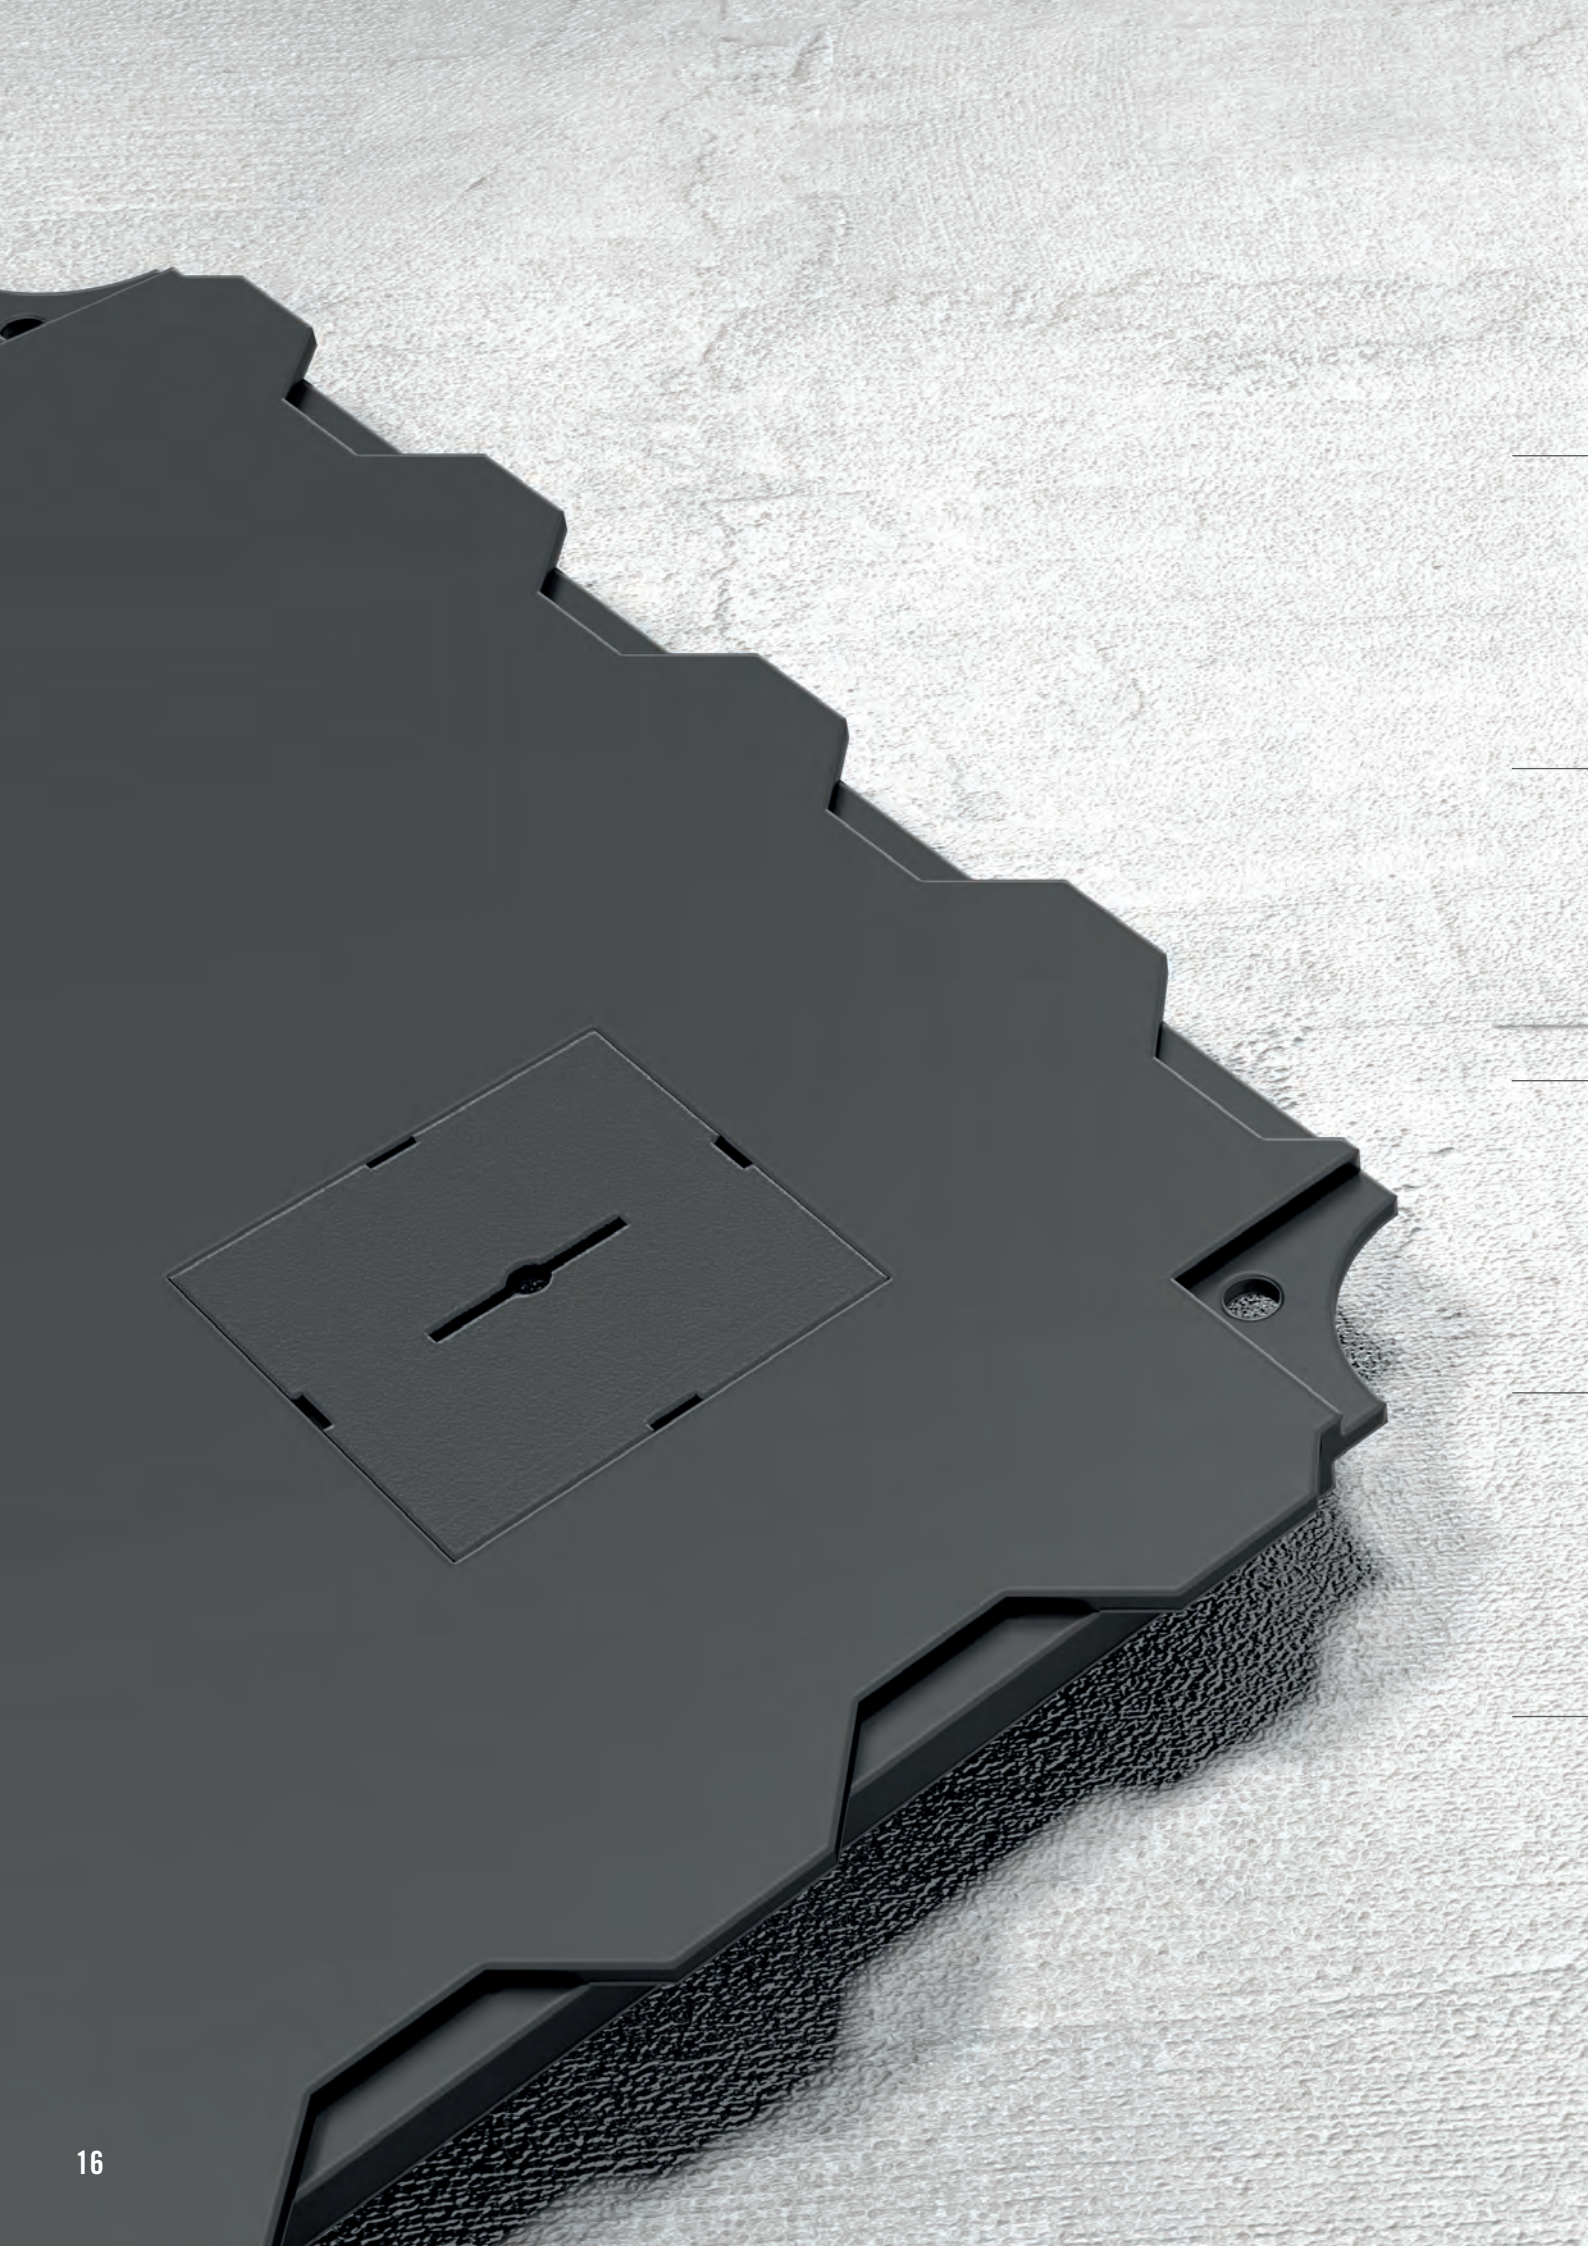



## TECHNICAL FEATURES


### OCTAeco floor




Working load



Use



1 panel size



Slope edge elements




Cable outlets per m<sup>2</sup>



Possible cable outlets per m<sup>2</sup> by rotating the panel



Sustainability



Flame retardant



Stackable height adaptors



25 m<sup>2</sup> of floor panels on one pallet

#### Large areas. Short time.

The OCTAeco floor's biggest advantage is the fast installation. Big areas – effortless.

#### For heavy weights of up to 20,000 kg/m<sup>2</sup>.

The well thought-out design offers maximum stability, making the floor perfect for high loads. You can even drive on it. The material is nonsensitive to moisture and thermal fluctuation.

#### Effortless assembly. Thanks to a simple connecting system.

The low weight in combination with the smart connector system allow for a quick and easy installation of your floor. Even with little personnel.

#### Individuality. With a system.


The panels can be turned 360°, allowing for a maximum of 25 possible cable outlets per m<sup>2</sup>. And if you need individually adjusted special panel shapes, OCTAeco floor also offers a panel that can be cut to size. Thanks to the stackable adaptors, the raised floor system is also flexible in terms of height and barrier-free thanks to ramps – no more steps or trip hazards.



**The fastest among them all.**

Made from 100 % recycled plastic, OCTAeco floor has a lifetime of at least 10 years. The longevity in combination with the outstanding value for money result in a quick amortization of the system. Also, it is sustainable and flame retardant (Cfl-s1). And all this at a working load limit of up to 20 t/m<sup>2</sup>. So no worries driving your 7.5 t truck onto the freshly laid floor in the future.

**ON INCINERATION,  
POLYPROPYLENE BREAKS  
DOWN COMPLETELY INTO  
WATER AND CO<sub>2</sub>.**

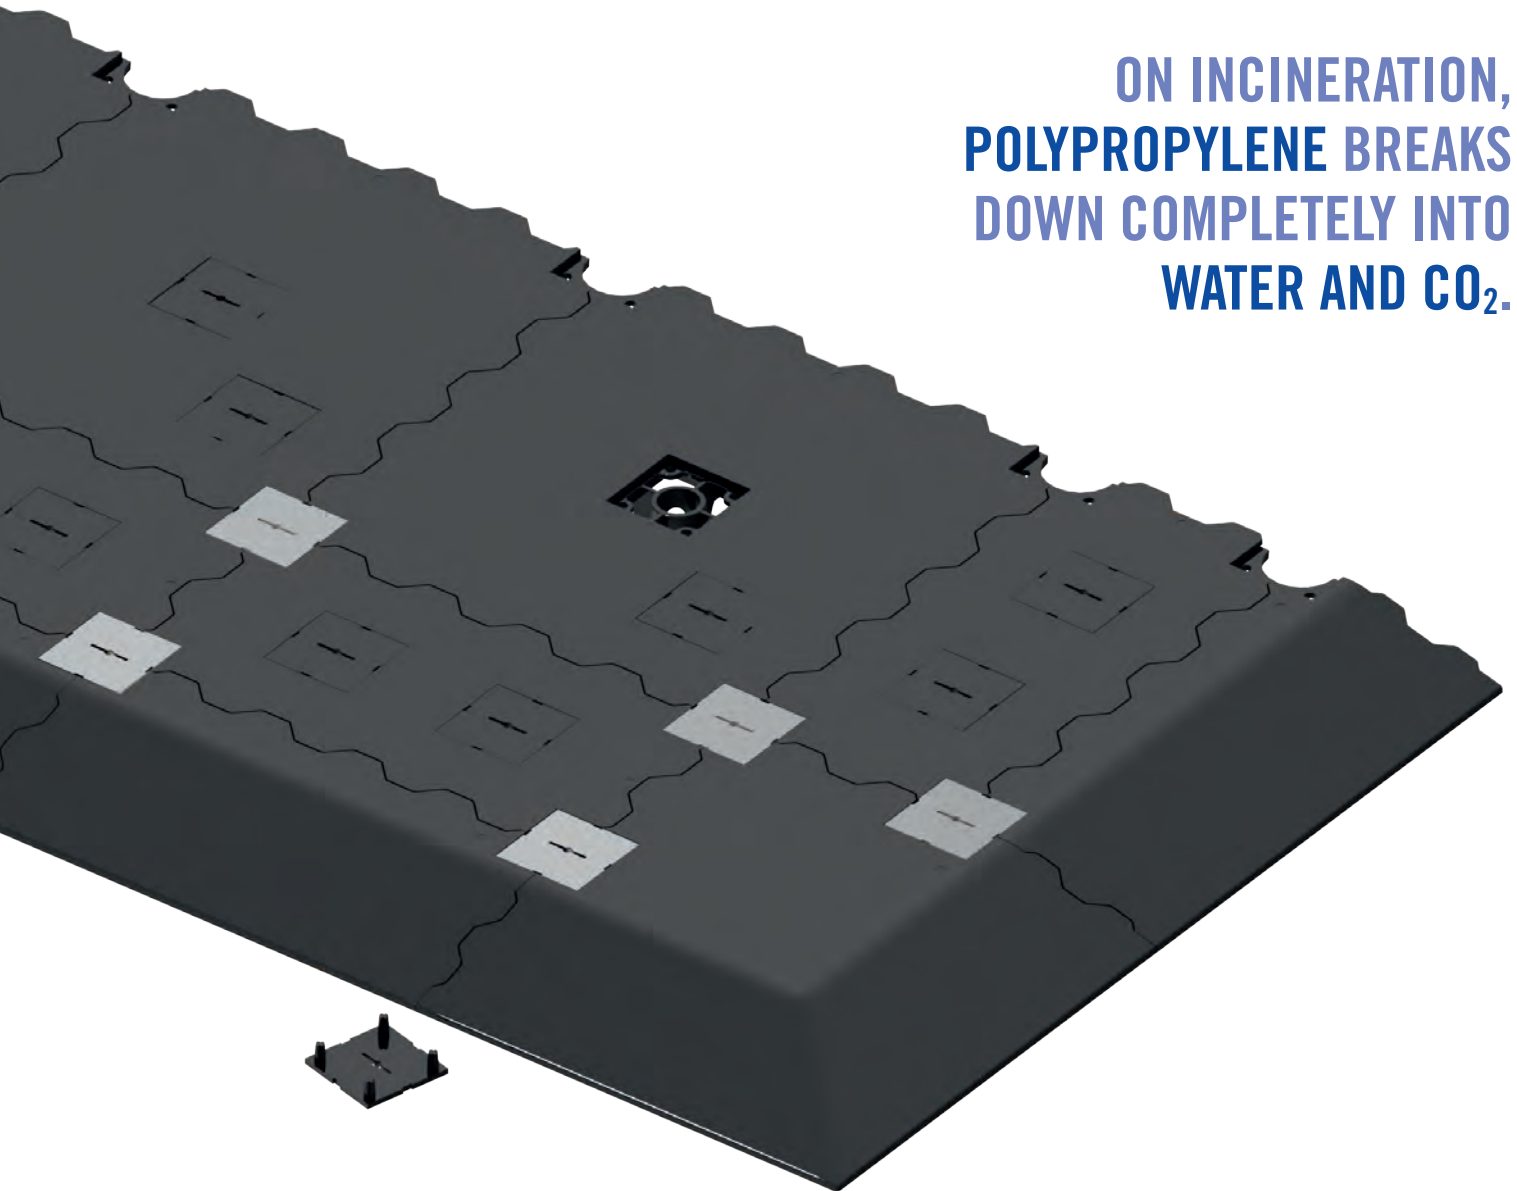**Barrier-free for more visitors.**

Ramp elements make the stand accessible for all groups of visitors. They connect seamlessly to the floor panels. Which means: no tripping hazards, no ledges or edges! Perfectly fitting aluminium strips ensure a neat laminate or carpet installation.



## DETAILS

### OCTAeco floor

#### Intelligent transportation. Quick installation.

You can transport up to 25 m<sup>2</sup> of floor panels on one pallet, keeping transportation easy. Just connect four panels to each other and stack them. Thanks to the low weight, those four-packs can be laid in one step. Saving valuable time. (Ramp elements are also available as a set)




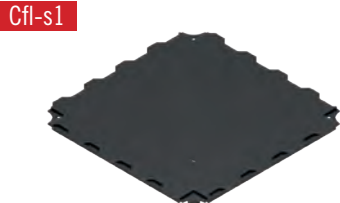
#### Easy cable and wire laying? Already integrated.

Up to three stacked adapters allow for a maximum overall height of 214 mm (floor panel + 1 height adaptor = 100 mm), while the bracings in the floor panels ensure a firm and secure hold. All required cables and pipes (max. Ø 54 mm) can be laid invisibly in the resulting space and positioned through the cable outlets – a quick installation without the need for additional modifications. Skirting boards are attachend just as easily. Distance pieces guarantee an even distance to the floor panels.





## THE 2 FLOOR SYSTEMS AT A GLANCE

	OCTACLASSIC FLOOR	OCTAECO FLOOR
		
<b>WORKING LOAD LIMIT</b>	up to 5,000 kg/m <sup>2</sup>	up to 20,000 kg/m <sup>2</sup>
<b>MATERIAL</b>	wood	polypropylene Cfl S1
<b>WATER AND WEATHERPROOF</b>	no (only indoor)	yes (outdoor)
<b>MINIMUM TOP EDGE</b>	95 mm	43 mm
<b>MAXIMUM TOP EDGE</b>	225 mm (foot + panel)	214 mm (3 adaptor + panel)
<b>GROUND CLEARANCE</b>	min. 55 mm	max. 28 mm
<b>ADJUSTABLE HEIGHT</b>	infinitely	57 mm steps
<b>CABLE OUTLETS / M<sup>2</sup></b>	1	9
<b>POSSIBLE CABLE OUTLETS PER M<sup>2</sup> BY ROTATING</b>	4	25
<b>WEIGHT / M<sup>2</sup></b>	approx. 10 kg	approx. 11 kg
<b>PLATES CAN BE REMOVED SUBSEQUENTLY</b>	yes	only the service plate
<b>ASSEMBLY TIME</b>	40 m <sup>2</sup> / 3 persons / 15 min	40 m <sup>2</sup> / 3 persons / 8 min
<b>SUSTAINABILITY</b>	often reusable	often reusable, 100% recyclable



# OVERVIEW

## OCTAfloor systems

### Advantages over traditional chipboard flooring:

- floor pays off after just a few use
- sustainability – no waste due to repeated usage
- shortest set-up times thanks to system design
- easy assembly and reduced staff requirement
- simple laying of cables through cable outlets and ground clearance







EXHIBITION SYSTEMS  
PROJECT SOLUTIONS  
PRESENTATION  
INTERIOR DESIGN  
CLEANROOM SYSTEMS







---

**OCTANORM® Germany**  
**Head Office**

Raiffeisenstraße 39  
70794 Filderstadt  
T. +49 711 77003-0  
F. +49 711 77003-53  
info@octanorm.de  
www.octanorm.com

---

**EUROPE**

**OCTANORM® Nordic**  
T. +46 8 621 6500  
www.octanorm.se

**OCTANORM® Polska**  
T. +48 22 773 0350  
www.octanorm.pl

**OCTANORM® Belgium**  
T. +32 475 35 60 76  
www.octanorm.be

**OCTANORM® France**  
T. +33 6 79 11 32 05  
www.octanorm.fr

**OCTANORM® UK**  
T. +44 20 85 45 2945  
www.octanorm.co.uk

**OCTANORM® Espana**  
T. +34 930 019 424  
www.octanorm.es

**OCTANORM® Hellas**  
T. +30 2310 79 6521  
www.octanorm.gr

**OCTANORM® Italia**  
T. +39 031 2269715  
www.octsystem.it

**OCTANORM® Adria**  
T. +386 590 56301  
www.octanormadria.com

---

**AFRICA**

**OCTANORM® South Africa**  
T. +27 11 433 2010  
www.octanorm.co.za

---

**AMERICA**

**OCTANORM® North America**  
T. +1 770 7 32 1520  
www.octanormna.com

**OCTANORM® México**  
T. +52 55 5804 6325  
www.octanorm.com.mx

---

**ASIA**

**OCTANORM® China**  
T. +86 512 6283 3336  
www.octanorm.cn

**OCTANORM® Japan**  
T. +81 45 511 8144  
www.octanorm.co.jp

---

**AUSTRALIA**

**OCTANORM® Australia**  
T. +61 3 7017 2753  
www.octanorm.com.au

---

**MIDDLE EAST**

**OCTANORM® Emirates**  
T. +971 4 340 6888  
www.octanormemirates.net